
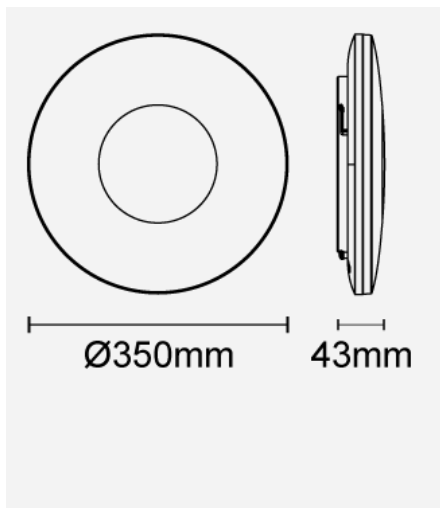


FCL74400v0

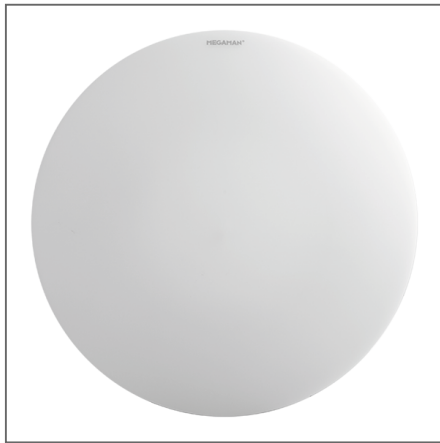

Product Code:

FCL74400v0

Electrical Data	
Voltage (V)	220-240V
Frequency (Hz)	50/60
Input Current (mA)	113
Power Factor (λ)	>0.9
Product Data	
Product Wattage (W)	24
Light Source	Integrated LED-6500
Colour Temperature (K)	3000, 4000, 6500
Colour Render Index (Ra)	Ra80
Protection Class	CL II
Colour Consistency (SDCM)	6
Dimmable	no
Operating Temperature	-30°C to +45°C
Ambient Temperature Range (Ta)	25
Switching Cycles (times)	100000
Application	Corridors, Hotels, Kitchens, Residential
Performance Data	
Rated Useful Luminous Flux (lm)	2820
Luminous Flux (lm)	2160 [3000K], 2400 [4000K], 2400 [6500K]
Luminous Efficacy (lm/W)	90 [3000K], 100 [4000K], 100 [6500K]
Rated Life (hrs)	25,000hrs L70B50@Ta25°C
IP Rating	IP40/IP40
Product Dimensions	
Diameter (mm)	350
Height (mm)	43

Product Code: FCL74400v0

MEGAMAN® 2005-2024. All Rights Reserved.

This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

www.hk.megaman.cc