


FOB77700v0-pl

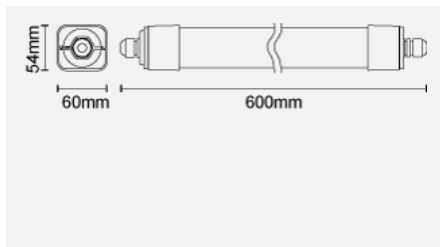

Product Code:

FOB77700v0-pl

Electrical Data	
Voltage (V)	220-240V
Frequency (Hz)	50/60
Input Current (mA)	92
Power Factor ( $\lambda$ )	0.9
Product Data	
Product Wattage (W)	19
Light Source	Integrated LED-6500
Colour Temperature (K)	3000, 4000, 6500
Colour Render Index (Ra)	Ra80
Protection Class	CL II
Colour Consistency (SDCM)	6
Dimmable	no
Operating Temperature	-30°C to +50°C
Ambient Temperature Range (Ta)	25
Switching Cycles (times)	100000
Application	Livestock husbandry
Performance Data	
Rated Useful Luminous Flux (lm)	2640
Luminous Flux (lm)	2100 [3000K], 2300 [4000K], 2300 [6500K]
Luminous Efficacy (lm/W)	111 [3000K], 121 [4000K], 121 [6500K]
Rated Life (hrs)	50,000hrs L80B50@Ta25°C
IP Rating	IP66/IP66
Product Dimensions	
Length (mm)	723
Width (mm)	60
Height (mm)	54

Product Code: FOB77700v0-pl

MEGAMAN® 2005-2024. All Rights Reserved.

This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

[www.hk.megaman.cc](http://www.hk.megaman.cc)

Remarks: DC Input Voltage:200-250VDC Glass-Fiber-Reinforced  
Nylon Endcap/PMMA Diffuser 4 pole terminal block: L1/L2/E/N  
L1:permanent live

Product Code: FOB77700v0-pl

MEGAMAN® 2005-2024. All Rights Reserved.

This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

[www.hk.megaman.cc](http://www.hk.megaman.cc)