
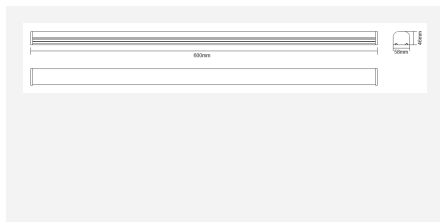


# FIB74100v0

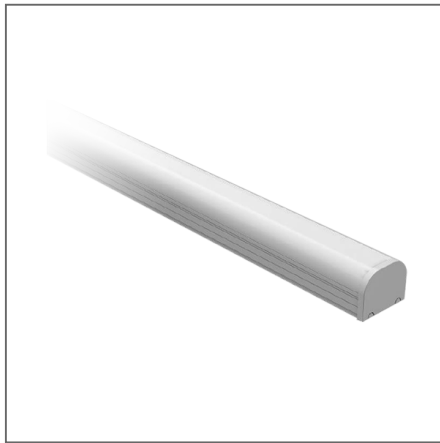

Product Code:

**FIB74100v0**

Electrical Data	
Voltage (V)	220-240V
Frequency (Hz)	50/60
Input Current (mA)	145
Power Factor ( $\lambda$ )	>0.9
Product Data	
Product Wattage (W)	30
Light Source	Integrated LED-3000
Colour Temperature (K)	3000, 4000, 6500
Colour Render Index (Ra)	$\geq$ Ra80
Protection Class	CL I
Colour Consistency (SDCM)	
Dimmable	No
Operating Temperature	-30°C to +40°C
Switching Cycles (times)	100,000
Weight (g)	475
Application	Corridors, Factories, Residential Lightings, Warehouses
Performance Data	
Luminous Flux (lm)	2230 [3000K], 2400 [4000K], 2400 [6500K]
Luminous Efficacy (lm/W)	74 [3000K], 80 [4000K], 80 [6500K]
Rated Life (hrs)	25,000hrs L70B50@Ta25°C
IP Rating	IP20/IP20
Product Dimensions	
Length (mm)	600
Width (mm)	58
Height (mm)	46

Product Code: FIB74100v0

MEGAMAN® 2005-2024. All Rights Reserved.

This document is for informational purpose only.

MEGAMAN® reserves the right to make changes from time to time in the interest of product developments without prior notification to any products herein.

[www.hk.megaman.cc](http://www.hk.megaman.cc)